


APPLICATION:

JOB NAME:

QUANTITY: _____ **ITEM NO.:** _____

PRODUCT NAME:
8" C/C BACKSPLASH MOUNT PRE-RINSE SPRING STYLE WITH ADD-ON FAUCET

SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

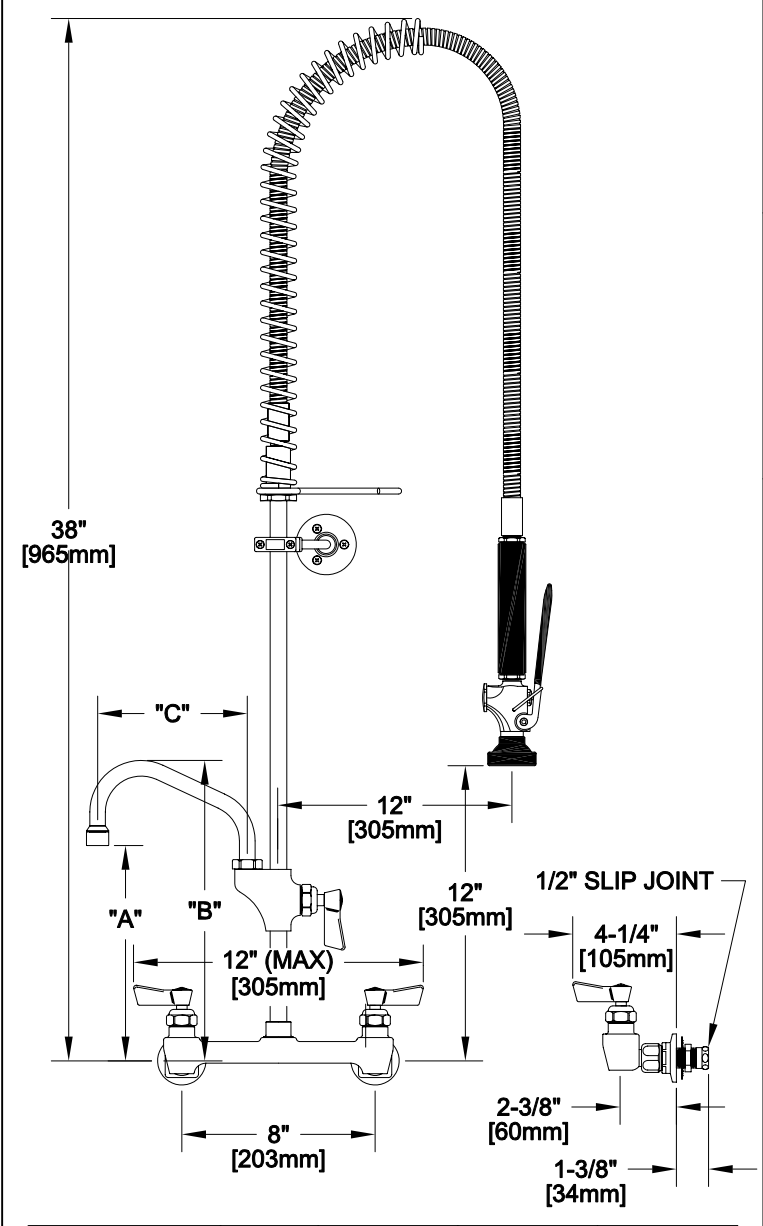

MODEL:

- 34436 WITH 6" SWING SPOUT
- 34444 WITH 8" SWING SPOUT
- 34452 WITH 10" SWING SPOUT
- 34460 WITH 12" SWING SPOUT
- 34479 WITH 14" SWING SPOUT
- 34487 WITH 16" SWING SPOUT

OPTIONS OR MODIFICATIONS:

- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- IN-LINE DUAL CHECK VALVE
- BRUSH
- HANDLES (CROSS OR WRIST) CIRCLE STYLE
- VANDAL RESISTANT KIT
- OTHER _____

FEATURES

MAIN CONTROL VALVE

- * 8" C/C BACKSPLASH MOUNT
- * INTERNAL SPRING LOADED CHECK VALVES
- * SWIVELLING SEAT DISKS
- * HOT SIDE STEM - RIGHT HAND CHECK
- * COLD SIDE STEM - LEFT HAND CHECK
- * STAINLESS STEEL SEATS, SEAT SCREWS, AND HANDLE SCREWS

HOSE

- * 36" LENGTH
- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE

- * LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
- * CLEANS FASTER - TEST PROVEN
- * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
- * INTERCHANGEABLE - FITS ALL BRANDS

WAL BRACKET

- * ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 15.0 LBS

ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"
	34436	8-3/4" [221mm]	12-3/8" [313mm]	6" [152mm]
	34444	9" [228mm]	12-7/8" [326mm]	8" [203mm]
	34452	9-5/8" [244mm]	13-3/8" [340mm]	10" [254mm]
	34460	10-1/4" [259mm]	13-7/8" [351mm]	12" [305mm]
	34479	10-5/8" [275mm]	14-3/4" [374mm]	14" [356mm]
	34487	11-1/2" [292mm]	15-3/8" [390mm]	16" [406mm]